


500 BBL Coast Guard Certified Independent Cargo Transport Tanks



COMMON USES: *Secure transportation and storage of drilling, production and completion fluids as well as fuel, waste and other liquids.*

SPECIFICATIONS

- Designed for offshore dynamic lifting in accordance with the provisions of API RP 2A and SEPco document OPS0055
- Designed and constructed in accordance with Marine Safety Manual, Chapter 11, Section F, Carriage of Combustible and Flammable Cargo, Independent Tanks. Maximum working pressure 18 PSIP. (PSIG)
- Tare weight: 37,000 LBS. [16,783 KG]
- Max gross weight: 500,000 LBS. [226,796 KG]
- Pay Load Weight: (lift empty only) 463,000 LBS. [210,013 KG]
- One 4" suction /drain line w/4" butterfly valve w male camlock and cap
- One 4" offset circulation line w/ 4" butterfly valve w/female camlock and plug camlock and plug
- Two 3" atmospheric vents
- Eight skid mounted weld downs
- Two 20" manway w/ladders
- One 30" cleanout/cleanout
- Full length top mounted walkway with hand rails
- Two equally spaced baffles
- Three part poly exterior coating
- High build chemical resistant liner
- External Dimensions:
 - Width: 2,591 mm [102"][8'6"]
 - Length: 12,700 mm [500"][41'8"]
 - Height-Hand Rails Down: 3,658 mm [144"][12']
 - Height-Hand Rails Up: 4,521 mm [178"][14'10"]

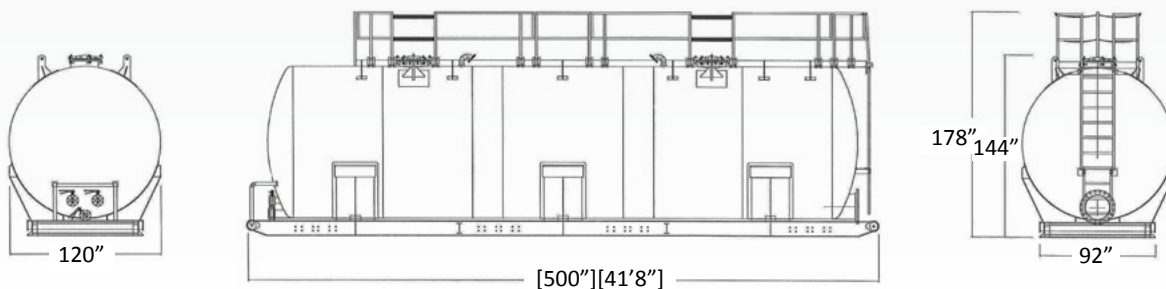

Make it happen.

www.TigerOffshoreRentals.com | 24/7 Dispatch 1.877.844.3791