

550 Gallon Acid Tank Package



COMMON USES: *The 550 Gallon Acid Tank (poly IBC) is built for safely moving hazardous fluids offshore. The tank is designed for corrosives, acids and solvents that are compatible with polyethylene. This is a dependable and versatile package for the Offshore E&P Industry.*



SPECIFICATIONS

FRAME

- Designed, tested, constructed, inspected with offshore identification markings to DNV 2.7-1, API RP 2A Sec. 2.4.2 C&D, SEPco Document OPS 0055, IMO/MSC Circular 860, EN 12079
- Third Party certification on design, testing, construction and inspection.
- Outside Dimensions -
- Length: 2,422 mm [95"][7'11"]
- Width: 1,584 mm [62"][5'2"]
- Height: 1,912 mm [75"][6'3"]
- Volume - 550 Gallons
- Est. Tare Weight: 3,220 lbs. [1,461 KG]
- Max Gross Weight: 9,610 lbs. [4,359 KG]
- Est. Payload Weight: 6,390 lbs. [2,898 KG]
- Equipped with drip pan

TANK

- UN/D.O.T. certified (UN31H2/HM-181E)
- 1/2" rotationally molded polyethylene
- 6.5" GEM Cap
- Molded in gallonage marker for easy monitoring
- Structural rib design for added strength
- 2" valve with two serial mounted closures
- Pay Load Weight: 5,600 lbs. [2,540 KG]

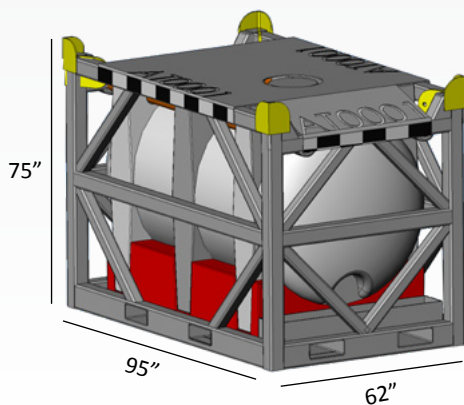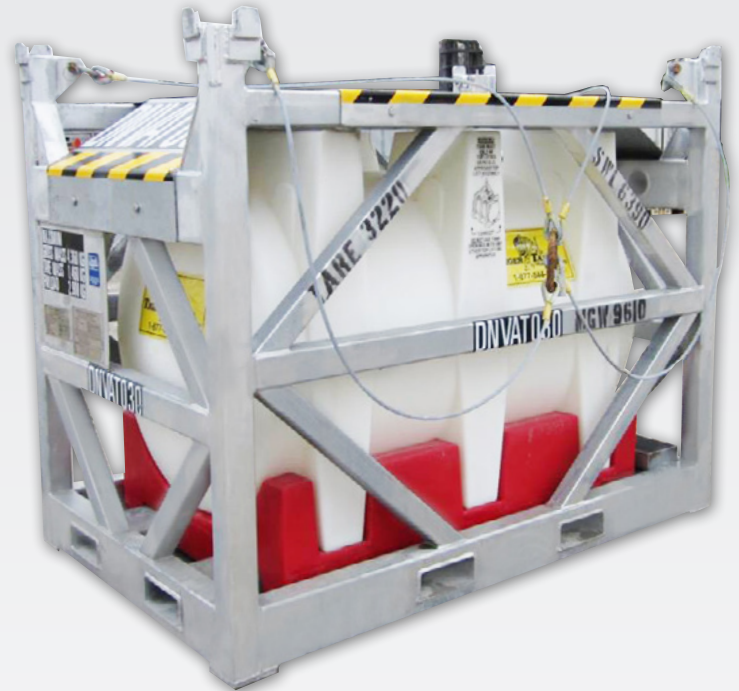

Make it happen.

www.TigerOffshoreRentals.com | 24/7 Dispatch 1.877.844.3791