



10' DNV 2.7-1 Lifting Frame Basket



COMMON USES: Engineered to handle over-width, bulky items during all weather offshore operations. Can be used for safe, secure transportation and storage of oversized spools, chain, anchors, umbilical cords, buoys, ROV's and construction materials.

SPECIFICATIONS

- Designed, tested, constructed, inspected with offshore identification markings to DNV 2.7-1, EN12079, IMO 860M SEPco OPS0055 and API RP 2A Sec.2.4.2c&d.
- Third-party certification on design, testing, construction and inspection
- Design Temperature is -20C
- Four built-in nylon ratchet straps
- Built in tie down rings
- Internal Dimensions:
 - Length: 6,955 mm [274"] [22'-10"]
 - Width: 2,688 mm [106"] [8'-10"]
 - Height: 1,034 mm [40"] [3'4"]
- External Dimensions:
 - Length: 7,139 mm [281"] [24']
 - Width: 3,052 mm [120"] [10']
 - Height: 1,525 mm [60"] [5']
- Max gross weight: 50,000 LBS (22,680 KG)
- Est. Tare Weight: 12,125 LBS (5,500 KG)
- Pay Load Weight: 37,875 LBS (17,180 KG)
- Hot Dipped Galvanized

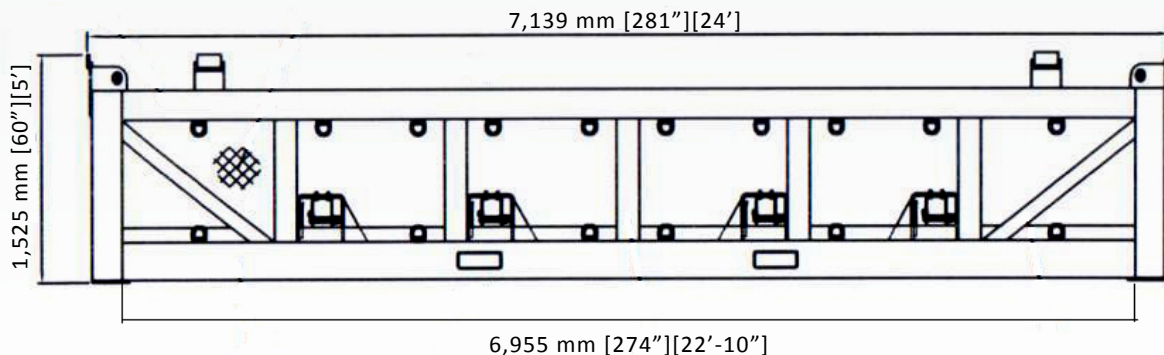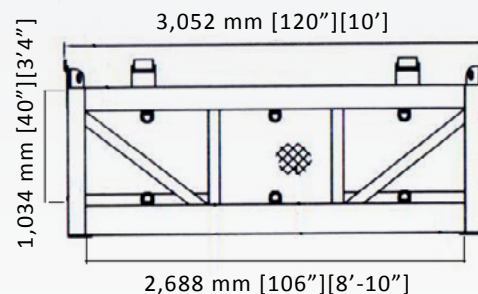

Make it happen.

www.TigerOffshoreRentals.com | 24/7 Dispatch 1.877.844.3791