

Tiger 8'x16' ECOMats™



COMMON USES: Temporary road, parking area, dock side support, heli pad or other hard surfacing needs.

SPECIFICATIONS

- Weight - 2,950 LBS +/- 2%
- 128 SQ FT Coverage
- 3 Ply - 8' x 16'
- .05% Absorption Rate
- Load Bearing Weight - in Excess of 1,000 PSI
- Galvanized 3 Channel Runners
- ASME B30 Lifting Standards
- ASTM E84 Class 2 (B) Flame Spread Index Rated
- Anti-Static Inhibitors

CERTIFIED

Meets ASME B30 Lifting Standards

FIRE PROOF

ECOMats™ have a Flame Spread Index - ASTM E84 CLASS 2 (B)

DURABLE/LONGER LASTING

Synthetic material designed with UV Inhibitors. Mats manufactured with up to 60% recycled material and 100% recyclable.

SUSTAINABLE/NO LIQUID ABSORPTION

When properly washed, the mats can safely leave chemical plants - does NOT absorb liquids. Does not have a hollow core and will not hold liquid like the hollow core composite mats.

GALVANIZED D-RINGS

Loads, offloads, lays, and moves easily with a fork truck or D-Ring for easy lifting.

COMPACT DESIGN

Reduces mud and debris collection as opposed to wood mats that have gaps in the mat to air out, thus having space to collect mud increasing weight driving up freight-out and cleaning costs.

SAFER/IMPROVED TRACTION


Improved traction over traditional mats when dry or wet. Final manufacturing process "sears" a slip resistant pattern into the top of the plank.

NO NAILS - ALL BOLTED


Bolted for extended strength and eliminates nails left after the job.

INCREASED FREIGHT SAVINGS

Mats are lighter than wood = FREIGHT SAVINGS. Ships 16 mats per load = FREIGHT SAVINGS.

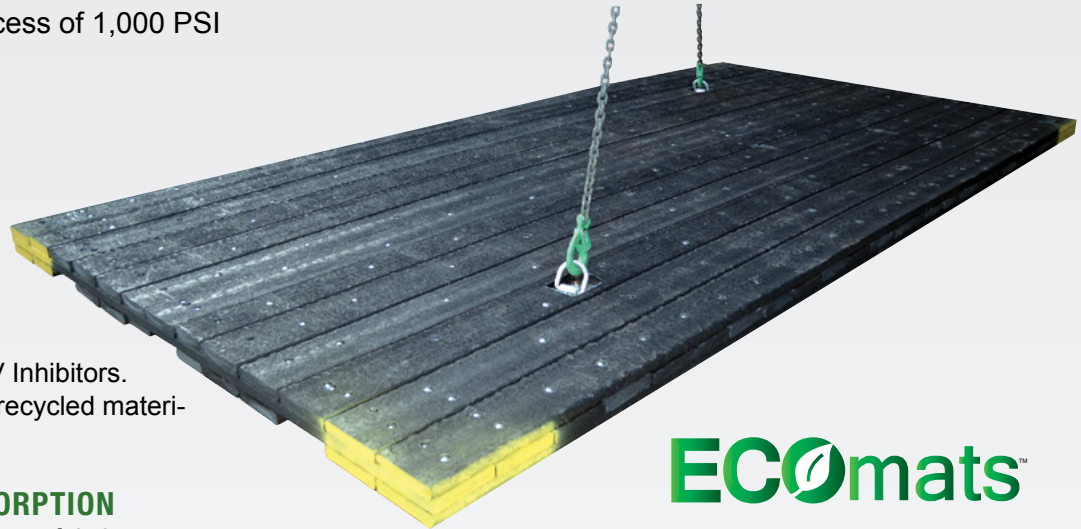

ECOMats™

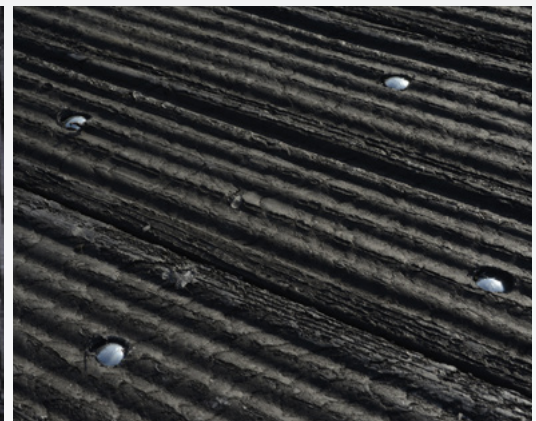

Make it happen.

www.TigerOffshoreRentals.com | 24/7 Dispatch 1.877.844.3791