


# DNV 118 BBL LIQUID TIGHT ROLL-OFF VACUUM CUTTINGS CONTAINER



## ▶ COMMON USES

Used for the transportation & storage of general cargo or any liquid type sludge, cuttings & waste. Meets DOT packaging requirements for Packing Group 3 combustible materials 49 CFR 173.241. Designed for standard hoist or roll off trailers. The CSC plating allows for shipping throughout multiple regions utilizing standard transportation modes (i.e. container ship, rail, or truck) so products can be shipped directly to or from an offshore drilling/production operation & then go by roll-off trailer or intermodal carrier without being classified as out of gauge/break bulk or being repackaged, drastically reducing the cost of supporting oilfield operations in distant or remote locations.

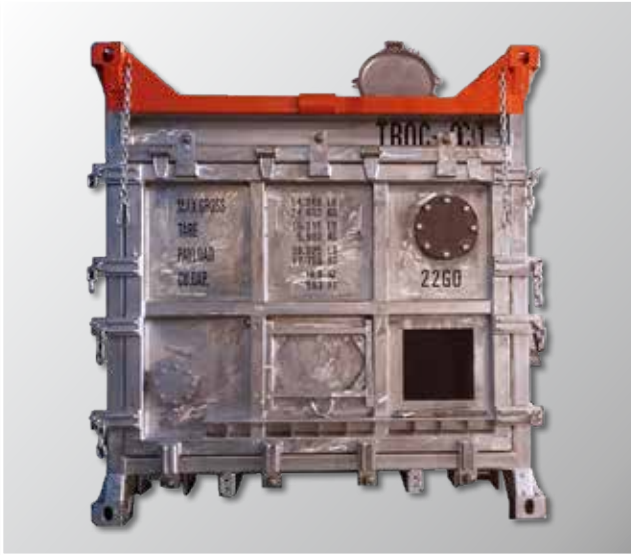

## ▶ TECHNICAL DATA

DIMENSIONS		L X W X H	
EXTERNAL (MM)	6096 x 2438 x 2591		
EXTERNAL (FT)	20' x 8' x 8'6"		
INTERNAL (MM)	5694 x 2102 x 1765		
INTERNAL (FT)	18'8" x 6'10" x 5'9"		
WEIGHT		KGS	LBS
TARE	6900	15215	
PAYLOAD	17700	39025	
MAX GROSS WEIGHT (MGW)	24600	54240	
VOLUME		CU M	GAL
INSIDE CAPACITY	18.77	4967	
ADDITIONAL FEATURES			
<ul style="list-style-type: none"> <li>Designed, Constructed, Tested to EN12079-1 / DNV 2.7-3 / SEPCo OPS 0055 / API RP</li> </ul>			



## ▶ DRAWINGS

