


## ▶ COMMON USES

Temporary road, parking area, dock side support, heli pad or other hard surfacing needs.

## ▶ TECHNICAL DATA

DIMENSIONS		L X W	
EXTERNAL (MM)	4878 x 2438		
EXTERNAL (FT)	16' x 8'		
SQUARE FOOT COVERAGE	128'		
WEIGHT	KGS	LBS	
TARE	1361	3000	
MAX GROSS WEIGHT RATING		1000/in <sup>2</sup>	

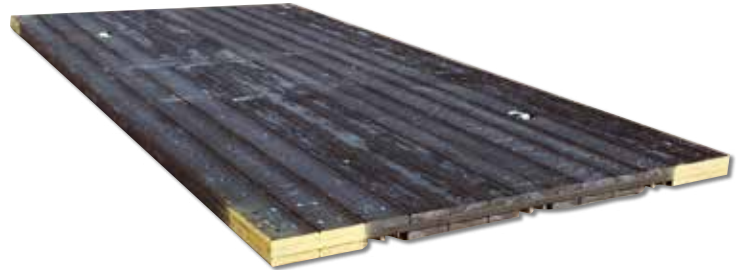

## ▶ BENEFITS

- .05% Absorption Rate
- Load Bearing Weight - in Excess of 1000 PSI
- 3 Ply
- Galvanized 3 Channel Runners
- ASME B30 Lifting Standards
- ASTM E84 Class 2 (B) Flame Spread Index Rated
- Anti-Static Inhibitors
- Proprietary Traction Grain Pattern
- Lighter than Oak Timber - Decreases Freight Charges
- No Nails - All Bolted
- Not Labor Intensive - No Bolting to Layer & Attach
- Loads, Off Loads, Lays and Moves Easily with a Fork Truck or D Rings for Easy Lifting

