

60' FLARE TRAILER

COMMON USES

The Folding 6" x 60' NACE Gooseneck Trailer Mounted Flare Trailer is used in the oil and gas, Flare Trailers provide a reliable solution for safely combusting excess gases, effectively reducing environmental and operational risks. **Benefits:** Easy mobility for quick movement. Pollution controlled and environment safe. Oil catch pan.

TECHNICAL DATA


DIMENSIONS	L X W X H
WHEN HAULING (MM)	11354 x 284 x 20447
WHEN HAULING (FT)	37' 3" x 7' 2" x 60' 8.5"
WHEN ERECTED (MM)	12,306 x 284 x 20447
WHEN ERECTED (FT)	40' 4.5" x 7' 2" x 60' 8.5"
SPECIFICATIONS	
<ul style="list-style-type: none"> • Cable Guides • 20" Outriggers • Tool Box • Propane tTank with Regulator • Dual 7,000 lb axles • 10,000 lb Jacks w/ electronic ignitor • Pilot with temp probe to prove ignition • Inlet Connection – 6" 150 lb RF • Liquid Collector • 20" x 8' with site glass connections only • 2" Drain Valve 	<ul style="list-style-type: none"> • 2" 206 female union welded onto 2" hand flare line to act as 2" flare stack • Flare Stack, control box, and propane tank are grounded • Propane supply line to Flare Stack is maintained and • made of steel • Control box and batteries are explosion proof • Drain Valve at base of Flare Stack • Propane supplied pilots for ignition • Weekly inspection for Proper Operations and Integrity.



DRAWINGS

HAULING VIEW

11265 mm [444"] [36'11.5"]

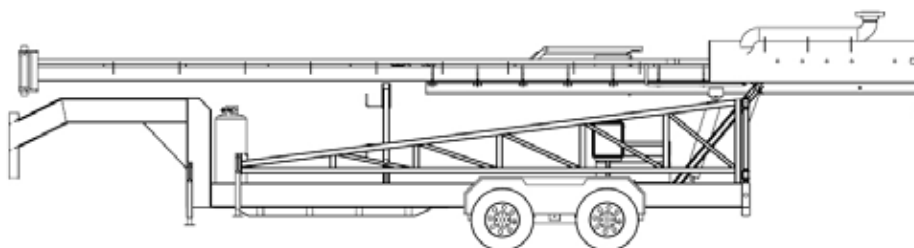

UP VIEW

12306 mm [485"] [40'4.5"]

